




## Components for BZC Control Stations HA Series Pushbuttons


- ◆ Explosion protection to
  - CENELEC
  - IEC
  - NEC
- ◆ Can be used in
  - Zone 1 and Zone 2
  - Zone 21 and Zone 22
  - Class I, Zone 1 and Zone 2
  - Class I, Division 1, Groups A , B, C, D
- ◆ Five different ways of operation
  - Spring-return pushbutton
  - Key-operated pushbutton
  - Mushroom stay-put emergency pushbutton
  - Mushroom turn-to-release emergency pushbutton
  - Rotary pushbutton

### ■ Catalogue number logic






HA (A for short)

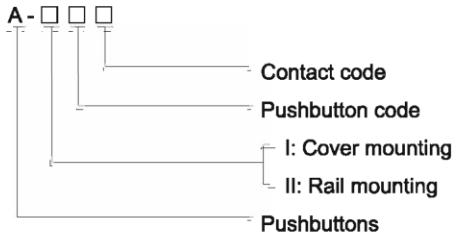



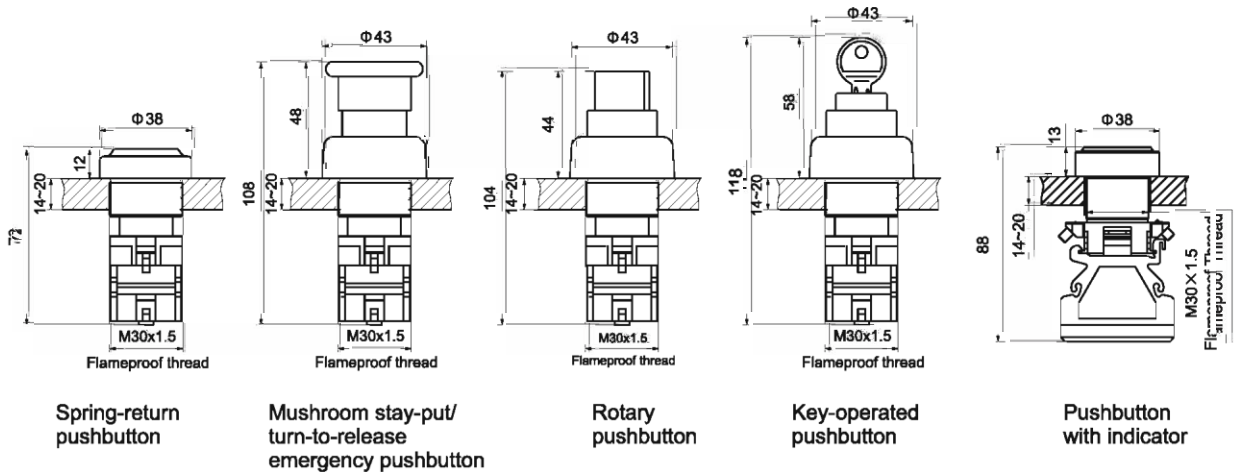















### ■ Dimension drawings (all dimensions in mm) - subject to alteration



## Zones 1&2; 21&22

Selection table of pushbutton contact				
Version	Specification	Contact code	Ordering code	Weight (kg)
 I: Cover mounting	 1 NO+1NC	R	40033-1	0.05
				40033-2
 II: Rail mounting	 2 NO	S	40034-1	0.05
				40034-2
	 2 NC	T	40035-1	0.05
				40035-2

Selection table						
Cover mounting	Rail mounting	Specification	Code	Ordering code	Weight (kg)	
		Spring-return pushbutton  Red  Green  Yellow	a	40036A-1 / 40036A-2	0.15	
			b	40036B-1 / 40036B-2	0.15	
			c	40036C-1 / 40036C-2	0.15	
		Mushroom stay-put emergency pushbutton	Red	d	40037-1 / 40037-2	0.27
		Mushroom turn-to-release emergency pushbutton	Red	e	40040-1 / 40040-2	0.27
		Rotary pushbutton	Black	f	40039-1 / 40039-2	0.27
		Key-operated pushbutton	Black	g	40038-1 / 40038-2	0.27
		Pushbutton with indicator  Red  Green  Yellow	a	40057A-1 / 40057A-2	0.15	
			b	40057B-1 / 40057B-2	0.15	
			c	40057C-1 / 40057C-2	0.15	

The last number of ordering code: 1 - cover mounting; 2 - rail mounting

