




Pendant Light Fittings

BAD61 Series Explosion-proof Light Fittings

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Available lamp (max. 400W)
 - Metal halide lamp (HIE)
 - High pressure mercury lamp (HME)
 - High pressure sodium lamp (HSE)
- ◆ Three enclosure types: 125, 250, 400.
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Explosion-proof trigger, rapid starting, stable performance and long service life.
- ◆ Wireless connection between body and top cover, easy installation and maintenance.
- ◆ Powder coated wire guard, white.
- ◆ Toughened glass cover resistant to temperature changes.

Catalogue number logic

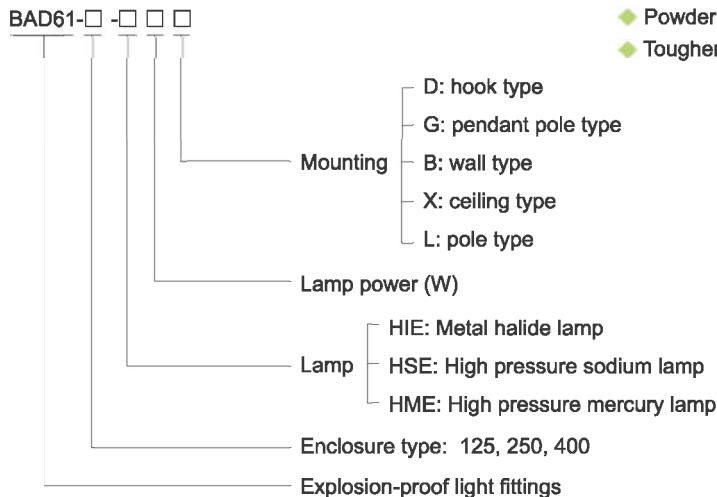

Selection table

Type/Ordering code	Available lamp power (W)			Lamp holder
	HIE	HSE	HME	
BAD61-125	70, 100, 150	70, 100	80, 125	E27
BAD61-250	175, 250	150, 250	175, 250	E40
BAD61-400	400	400	400	E40

Note

1. The light fittings are supplied without lamp. PHILIPS lamps are recommended.
2. HPI European standard ballast is supplied with HIE light fitting. HPI European standard lamps are recommended.
3. The light fittings are supplied without external reflector. Please specify when ordering.

Zones 1&2; 21&22