




Empty Enclosures

BXT-e Series Increased Safety Enclosures (Ex e)

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 2, Groups A, B, C, D
- ◆ Copper-free aluminium enclosure (Ex e), 8 types.
- ◆ Cable entries can be drilled and components can be installed by user on request.
- ◆ Safety shall be considered when installing components according to related electrical standards.
- ◆ Special requirements on request.


Catalogue number logic

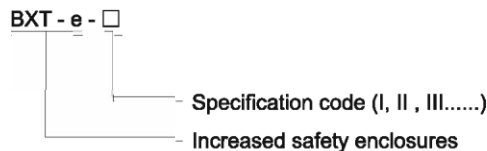

Technical data	
Increased safety enclosures	BXT-e-□
Explosion protection	
Gas explosion protection	⊕ II 2 G Ex e IIC Gb
Dust explosion protection	⊕ II 2 D Ex tb IIIC Db IP66
Certificates	LCIE 13 ATEX _____
Conformity to standards	EN 60079-0:2009, EN 60079-7:2007, EN 60079-31:2009 IEC 60079-0:2011, IEC 60079-7:2006, IEC 60079-31:2008
Degree of protection	IP66
Ambient temperature	-60°C~+100°C
Enclosure material	Copper-free aluminium; powder coated surface, window grey (RAL7040)

Zones 1&2; 21&22

Selection table of BXT-e series increased safety enclosures (all dimensions in mm)

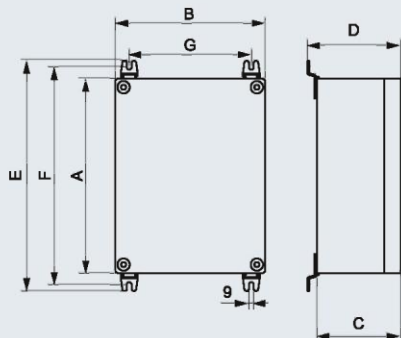


Outline & Installation

Type	Outline dimensions				Installation dimensions		
	A	B	C	D	E	F	G
BXT-e-I	130	190	127	143	254	232	92
BXT-e-II	190	190	127	143	254	232	150
BXT-e-III	190	250	127	143	314	292	150
BXT-e-IV	250	250	127	143	314	292	210
BXT-e-V	200	300	150	167	364	342	150
BXT-e-VI	300	300	150	167	364	342	250
BXT-e-VII	250	350	150	167	414	392	200
BXT-e-VIII	350	502	150	167	566	566	300


Note: Other dimensions on request

Internal

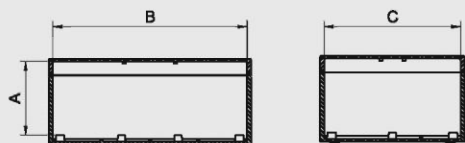

Type	Dimensions			Weight (kg)
	A	B	C	
BXT-e-I	108	177	120	2.40
BXT-e-II	107	177	177	2.80
BXT-e-III	107	237	177	3.80
BXT-e-IV	107	235	235	5.10
BXT-e-V	130	286	186	5.80
BXT-e-VI	130	286	286	7.10
BXT-e-VII	130	336	236	7.00
BXT-e-VIII	130	488	336	9.50

Mounting plate



Type	Dimensions						
	A	B	C	D	E	F	t
BXT-e-I	173	98	162	40	7	13	2
BXT-e-II	173	117	162	40	7	13	2
BXT-e-III	222	106	200	40	7	13	2
BXT-e-IV	220	160	200	124	7	13	2
BXT-e-V	270	170	210	110	7	13	2
BXT-e-VI	270	270	210	210	7	13	2
BXT-e-VII	320	220	260	160	7	13	2
BXT-e-VIII	470	320	402	206	7	13	2